

Lovato CANADA

Promotions
2 0 2 5

● Solid State Relays Hockey Puck



Item #	Description	Unit Price
HS1B2NT025D024	SSR hockey puck 1 phase 25A line 12-280VAC control 3-32VDC	\$41.45
HS1B2NT025E230	SSR hockey puck 1 phase 25A line 12-280VAC control 18-280VAC/DC	\$42.70
HS1B6NT040D024	SSR hockey puck 1 phase 40A line 24-600VAC control 3.5-32VDC	\$49.80
HS1B6NT040E230	SSR hockey puck 1 phase 40A line 24-600VAC control 18-280VAC/DC	\$51.60
HS1B6NN050D024	SSR hockey puck 1 phase 50A line 24-600VAC control 3.5-32VDC	\$49.00
HS1B6NT060D024	SSR hockey puck 1 phase 60A line 24-600VAC control 3.5-32VDC	\$73.15
HS1B6NT060E230	SSR hockey puck 1 phase 60A line 24-600VAC control 18-280VAC/DC	\$79.30
HSBXH1	Heatsink 2.2K/W for one HS1B... or HS2B... solid state relays	\$40.95
HSBXP0001	Thermal pad 1 piece for HS1B... or HS2B... solid state relays	\$2.05

● Solid State Relays Complete with Heatsink



Item #	Description	Unit Price
HS1C2HV025D024	SSR c/w heatsink 1 phase 25A line 12-275VAC control 3-32VDC	\$58.80
HS1C6HV025A230	SSR c/w heatsink 1 phase 25A line 48-600VAC control 90-280VAC	\$70.55
HS1C6HV040D024	SSR c/w heatsink 1 phase 40A line 48-600VAC control 4-32VDC	\$124.65
HS1C6HV040A230	SSR c/w heatsink 1 phase 40A line 48-600VAC control 90-280VAC	\$126.90

● Power Distribution Blocks



Item #	Description	Unit Price
ACB1P085A07	Power distribution block 1 pole 85A 7 terminals	\$12.30
ACB1P150A08	Power distribution block 1 pole 150A 8 terminals	\$21.35
ACB1P200A08	Power distribution block 1 pole 200A 8 terminals	\$33.75
ACB1P520A12	Power distribution block 1 pole 520A 12 terminals	\$65.65

● Safety Contactors



Item #	Motor Full Load Amps (FLA) 600V	UL/CSA General (purpose) use	Maximum UL/CSA Horsepower Ratings						Incorporated Auxiliary Contacts		Unit Price
			1 Phase 120V	240V	3 Phase 208V	240V	480V	600V	NO	NC	
	[A]	[A]	[HP]	[HP]	[HP]	[HP]	[HP]	[HP]			
AC coil.											
BFS0923A①	9	25	³ / ₄	2	3	3	5	7 ¹ / ₂	2	3	\$107.75
BFS1223A①	12	28	1	2	5	5	7 ¹ / ₂	10	2	3	\$119.95
BFS2523A①	25	32	2	3	7 ¹ / ₂	7 ¹ / ₂	15	15	2	3	\$175.55
BFS3222A①	32	56	3	7 ¹ / ₂	10	10	20	25	2	2	\$239.55
BFS3822A①	38	56	3	7 ¹ / ₂	10	15	30	30	2	2	\$274.30
DC coil. 24V.											
BFS0923D024	9	25	³ / ₄	2	3	3	5	7 ¹ / ₂	2	3	\$187.10
BFS1223D024	12	28	1	2	5	5	7 ¹ / ₂	10	2	3	\$203.15
BFS2523D024	25	32	2	3	7 ¹ / ₂	7 ¹ / ₂	15	15	2	3	\$269.80
BFS3222D024	32	56	3	7 ¹ / ₂	10	10	20	25	2	2	\$347.35
BFS3822D024	38	56	3	7 ¹ / ₂	10	15	30	30	2	2	\$355.70

- ① Complete item # with coil voltage digit.
Standard voltages are as follows:
- AC 50-60Hz 024 - 048 - 110 - 230V.

● Safety Relays



Item #	Description	Unit Price
Single function. Screw terminals.		
SRBES20	Safety relay 2NO	\$211.00
SRBES31	Safety relay 3NO+1NC	\$252.70
Safe outputs expansion module. Screw terminals.		
SRBEM41	Safety relay exp. unit 4NO+1NC	\$313.50



Item #	Description	Unit Price
Single function. Screw terminals.		
SRASM20	Safety relay with OSSD devices integrated 2NO	\$196.65
SRATH21	Safety relay 2-hand devices 2NO+1PNP	\$293.15
SRALC21	Safety relay light curtains 2NO+1PNP	\$313.50
Multifunction. Screw terminals.		
SRAMF21	Multifunction safety relay 2NO+1PNP	\$365.15



Item #	Description	Unit Price
Programmable multifunction. Screw terminals.		
SRPMFA164	Programmable safety relay 16 inputs 4 outputs	\$996.10

RFID Safety Sensors



Item #	Description	Unit Price
5-pin version.		
SSF5GM	RFID safety sensor 5 pins generic M12	\$199.15
SSF5GP	RFID safety sensor 5 pins generic pigtail	\$232.35
8-pin version.		
SSF8GM	RFID safety sensor 8 pins generic M12	\$214.25
SSF8GP	RFID safety sensor 8 pins generic pigtail	\$241.40
SSF8TM	RFID safety sensor 8 pins teach-in M12	\$229.35

Surge Protection Devices Type 1CA



Item #	Description	Unit Price
SG13PA300RUL	Surge protection device type 1CA 300VAC UL1449	\$336.15
SG13PA350RUL	Surge protection device type 1CA 350VAC UL1449	\$336.15
SG13PA480RUL	Surge protection device type 1CA 480VAC UL1449	\$336.15
SG13PA750RUL	Surge protection device type 1CA 750VAC UL1449	\$336.15

Moulded Case Circuit Breakers



Item #	Description	Unit Price
P5ME3PH0100UL	MCCB UL489 3 poles 40-100A 600V 35kA	\$970.75
P5ME3PH0250UL	MCCB UL489 3 poles 80-250A 600V 35kA	\$1304.85
P5ME3PH0400UL	MCCB UL489 3 poles 150-400A 600V 35kA	\$2237.90
P5ME3PH0600UL	MCCB UL489 3 poles 225-600A 600V 35kA	\$3418.25

1 POLE

Description	Supplementary Protection* (UL1077/CSA: C22.2 No 235)		Branch Protection (UL489/CSA: C22.2 No 5)	
	Item #	Unit Price	Item #	Unit Price
CURVE C - 1A	P1MB1PC01	\$15.65	P1MBUH1PC01	\$29.85
CURVE C - 1.6A	N/A		P1MBUH1PC01V6	\$29.85
CURVE C - 2A	P1MB1PC02	\$15.65	P1MBUH1PC02	\$29.85
CURVE C - 3A	P1MB1PC03	\$15.65	P1MBUH1PC03	\$29.85
CURVE C - 4A	P1MB1PC04	\$15.65	P1MBUH1PC04	\$29.85
CURVE C - 5A	N/A		P1MBUH1PC05	\$29.85
CURVE C - 6A	P1MB1PC06	\$15.65	P1MBUH1PC06	\$29.85
CURVE C - 7A	N/A		P1MBUH1PC07	\$29.85
CURVE C - 8A	P1MB1PC08	\$15.65	P1MBUH1PC08	\$29.85
CURVE C - 10A	P1MB1PC10	\$15.65	P1MBUH1PC10	\$29.85
CURVE C - 12A	N/A		P1MBUH1PC12	\$29.85
CURVE C - 13A	P1MB1PC13	\$15.65	P1MBUH1PC13	\$29.85
CURVE C - 15A	N/A		P1MBUH1PC15	\$29.85
CURVE C - 16A	P1MB1PC16	\$15.65	P1MBUH1PC16	\$29.85
CURVE C - 20A	P1MB1PC20	\$15.65	P1MBUH1PC20	\$29.85
CURVE C - 25A	P1MB1PC25	\$15.65	P1MBUH1PC25	\$29.85
CURVE C - 30A	N/A		P1MBUH1PC30	\$29.85
CURVE C - 32A	P1MB1PC32	\$15.65	P1MBUH1PC32	\$29.85
CURVE C - 35A	N/A		P1MBUL1PC35	\$31.20
CURVE C - 40A	P1MB1PC40	\$19.80	P1MBUL1PC40	\$31.20
CURVE C - 50A	P1MB1PC50	\$19.80	P1MBUL1PC50	\$31.20
CURVE C - 60A	N/A		P1MBUL1PC60	\$31.20
CURVE C - 63A	P1MB1PC63	\$19.80	P1MBUL1PC63	\$31.20

* This product is cURus.



2 POLES

Description	Supplementary Protection* (UL1077/CSA: C22.2 No 235)		Branch Protection (UL489/CSA: C22.2 No 5)	
	Item #	Unit Price	Item #	Unit Price
CURVE C - 1A	P1MB2PC01	\$37.15	P1MBUH2PC01	\$73.15
CURVE C - 1.6A	P1MB2PC01V6	\$37.15	P1MBUH2PC01V6	\$73.15
CURVE C - 2A	P1MB2PC02	\$37.15	P1MBUH2PC02	\$73.15
CURVE C - 3A	P1MB2PC03	\$37.15	P1MBUH2PC03	\$73.15
CURVE C - 4A	P1MB2PC04	\$37.15	P1MBUH2PC04	\$73.15
CURVE C - 5A	N/A		P1MBUH2PC05	\$73.15
CURVE C - 6A	P1MB2PC06	\$37.15	P1MBUH2PC06	\$73.15
CURVE C - 7A	N/A		P1MBUH2PC07	\$73.15
CURVE C - 8A	P1MB2PC08	\$37.15	P1MBUH2PC08	\$73.15
CURVE C - 10A	P1MB2PC10	\$37.15	P1MBUH2PC10	\$73.15
CURVE C - 12A	N/A		P1MBUH2PC12	\$73.15
CURVE C - 13A	P1MB2PC13	\$37.15	P1MBUH2PC13	\$73.15
CURVE C - 15A	N/A		P1MBUH2PC15	\$73.15
CURVE C - 16A	P1MB2PC16	\$37.15	P1MBUH2PC16	\$73.15
CURVE C - 20A	P1MB2PC20	\$37.15	P1MBUH2PC20	\$73.15
CURVE C - 25A	P1MB2PC25	\$37.15	P1MBUH2PC25	\$73.15
CURVE C - 30A	N/A		P1MBUH2PC30	\$73.15
CURVE C - 32A	P1MB2PC32	\$37.15	P1MBUH2PC32	\$73.15
CURVE C - 35A	N/A		P1MBUL2PC35	\$79.60
CURVE C - 40A	P1MB2PC40	\$41.40	P1MBUL2PC40	\$79.60
CURVE C - 50A	P1MB2PC50	\$41.40	P1MBUL2PC50	\$79.60
CURVE C - 60A	N/A		P1MBUL2PC60	\$79.60
CURVE C - 63A	P1MB2PC63	\$41.40	P1MBUL2PC63	\$79.60

* This product is cURus.



3 POLES

Description	Supplementary Protection* (UL1077/CSA: C22.2 No 235)		Branch Protection (UL489/CSA: C22.2 No 5)	
	Item #	Unit Price	Item #	Unit Price
CURVE C - 1A	P1MB3PC01	\$52.55	P1MBUH3PC01	\$106.45
CURVE C - 1.6A	N/A		P1MBUH3PC01V6	\$106.45
CURVE C - 2A	P1MB3PC02	\$52.55	P1MBUH3PC02	\$106.45
CURVE C - 3A	P1MB3PC03	\$52.55	P1MBUH3PC03	\$106.45
CURVE C - 4A	P1MB3PC04	\$52.55	P1MBUH3PC04	\$106.45
CURVE C - 5A	N/A		P1MBUH3PC05	\$106.45
CURVE C - 6A	P1MB3PC06	\$52.55	P1MBUH3PC06	\$106.45
CURVE C - 7A	N/A		P1MBUH3PC07	\$97.95
CURVE C - 8A	P1MB3PC08	\$52.55	P1MBUH3PC08	\$97.95
CURVE C - 10A	P1MB3PC10	\$52.55	P1MBUH3PC10	\$97.95
CURVE C - 12A	N/A		P1MBUH3PC12	\$97.95
CURVE C - 13A	P1MB3PC13	\$52.55	P1MBUH3PC13	\$97.95
CURVE C - 15A	N/A		P1MBUH3PC15	\$97.95
CURVE C - 16A	P1MB3PC16	\$52.55	P1MBUH3PC16	\$97.95
CURVE C - 20A	P1MB3PC20	\$52.55	P1MBUH3PC20	\$97.95
CURVE C - 25A	P1MB3PC25	\$52.55	P1MBUH3PC25	\$97.95
CURVE C - 30A	N/A		P1MBUH3PC30	\$97.95
CURVE C - 32A	P1MB3PC32	\$52.55	P1MBUH3PC32	\$97.95
CURVE C - 35A	N/A		P1MBUL3PC35	\$112.20
CURVE C - 40A	P1MB3PC40	\$56.85	P1MBUL3PC40	\$112.20
CURVE C - 50A	P1MB3PC50	\$56.85	P1MBUL3PC50	\$112.20
CURVE C - 60A	N/A		P1MBUL3PC60	\$112.20
CURVE C - 63A	P1MB3PC63	\$56.85	P1MBUL3PC63	\$112.20

* This product is cURus.



● Slim Electromechanical Relays Assembled on the Socket



Item #	Description	Qty/pkg	Unit Price
HRA101CE024	24VAC/DC, 1 C/O contact, 6A, screw terminals	10	\$14.35
HRA101CE024S	24VAC/DC, 1 C/O contact, 6A, spring terminals	10	\$14.35

● Miniature Relays without LED Indicator or Mechanical Actuator



Item #	Description	Qty/pkg	Unit Price
HR401CD012	12VDC, 1 C/O contact, 16A ¹	10	\$4.75
HR401CD024	24VDC, 1 C/O contact, 16A ¹	10	\$4.75
HR402CD012	12VDC, 2 C/O contacts, 10A	10	\$5.35
HR402CD024	24VDC, 2 C/O contacts, 10A	10	\$5.35
HR5XS22	Socket for relays, screw terminals	10	\$4.90
HR5X87	Retain clip	20	\$0.35
HR5X30	Marker tags	100	\$0.30

¹ Rated current if the relay is soldered directly onto the board; with socket, the maximum current is 10A.

● Miniature Relays with LED Indicator and Mechanical Actuator



Item #	Description	Qty/pkg	Unit Price
HR501CA024	24VAC, 1 C/O contact, 16A ¹	10	\$7.70
HR501CA110	120VAC, 1 C/O contact, 16A ¹	10	\$8.75
HR501CA230	230VAC, 1 C/O contact, 16A ¹	10	\$10.35
HR501CD012	12VDC, 1 C/O contact, 16A ¹	10	\$6.75
HR501CD024	24VDC, 1 C/O contact, 16A ¹	10	\$6.75
HR502CA024	24VAC, 2 C/O contacts, 8A	10	\$8.50
HR502CA110	120VAC, 2 C/O contacts, 8A	10	\$9.75
HR502CA230	230VAC, 2 C/O contacts, 8A	10	\$11.45
HR502CD012	12VDC, 2 C/O contacts, 8A	10	\$7.55
HR502CD024	24VDC, 2 C/O contacts, 8A	10	\$7.55
HR5XS22	Socket for relays, screw terminals	10	\$4.90
HR5X87	Retain clip	20	\$0.35
HR5X30	Marker tags	100	\$0.30

¹ Rated current if the relay is soldered directly onto the board; with socket, the maximum current is 10A.

Industrial Relays with LED Indicator and Mechanical Actuator



Item #	Description	Qty/pkg	Unit Price
HR602CA024	24VAC, 2 C/O contacts, 7A	10	\$6.35
HR602CA110	120VAC, 2 C/O contacts, 7A	10	\$6.35
HR602CA230	230VAC, 2 C/O contacts, 7A	10	\$6.35
HR602CD012	12VDC, 2 C/O contacts, 7A	10	\$6.35
HR602CD024	24VDC, 2 C/O contacts, 7A	10	\$6.35
HR604CA024	24VAC, 4 C/O contacts, 5A	10	\$7.25
HR604CA110	120VAC, 4 C/O contacts, 5A	10	\$7.25
HR604CA230	230VAC, 4 C/O contacts, 5A	10	\$7.25
HR604CD012	12VDC, 4 C/O contacts, 5A	10	\$7.25
HR604CD024	24VDC, 4 C/O contacts, 5A	10	\$7.25
HR6XS22	Socket for relays w/2 contacts, screw terminals	10	\$4.25
HR6XS42	Socket for relays w/4 contacts, screw terminals	10	\$4.85
HR6X88	Retain/release clip	20	\$0.35
HR6X30	Marker tags	100	\$0.20

8-Pin and 11-Pin Industrial Relays with LED and Mechanical Actuator



Item #	Description	Qty/pkg	Unit Price
8-Pin type			
HR702CA024	24VAC, 2 C/O contacts, 10A	10	\$9.40
HR702CA110	120VAC, 2 C/O contacts, 10A	10	\$9.40
HR702CA230	230VAC, 2 C/O contacts, 10A	10	\$9.40
HR702CD024	24VDC, 2 C/O contacts, 10A	10	\$9.40
HR702CD110	110VDC, 2 C/O contacts, 10A	10	\$9.40
11-Pin type			
HR703CA024	24VAC, 3 C/O contacts, 10A	10	\$11.70
HR703CA110	120VAC, 3 C/O contacts, 10A	10	\$11.70
HR703CA230	230VAC, 3 C/O contacts, 10A	10	\$11.70
HR703CD024	24VDC, 3 C/O contacts, 10A	10	\$11.70
HR703CD110	110VDC, 3 C/O contacts, 10A	10	\$11.70
HR7XS1	Socket for 8-pin relays, screw terminals	10	\$4.25
HR7XS2	Socket for 11-pin relays, screw terminals	10	\$4.85
HR7X87	Retain clip	20	\$0.35

Power Relays with Atex Certification



Item #	Description	Qty/pkg	Unit Price
HR8020A024	24VAC, 2 NO contacts, 30A	10	\$16.95
HR8020A230	230VAC, 2 NO contacts, 30A	10	\$16.95
HR802CA024	24VAC, 2 C/O contacts, 30A ¹	10	\$16.95
HR802CA230	230VAC, 2 C/O contacts, 30A ¹	10	\$16.95

¹ 3A for NC contact

Note: These items are sold by package only

● Soft Starters ADXN Series

- 2 Mechanical frame sizes
 - 6. 12. 18A - 25. 30. 38. 45A
- Compact dimensions
45mm wide housing for the entire range
- Integrated protection functions
- Integrated bypass
- Rated line voltage from 208 to 600 VAC
- NFC configuration
- 2 integrated relay outputs
- IR optical port
- 3 status LED
- cULus certified



VERSION	ADXNB BASIC	ADXNP ADVANCED
Controlled phases	2	2
Integrated bypass	√	√
Digital start input	√	√
Digital relay outputs	√ 2 fixed function	√ 2 programmable
Configurable alarm properties	-	√
Protection against phase loss	√	√
Protection against phase inversion	√ disabled	√
Soft starter thermal protection (overtemperature)	√	√
NFC connectivity for programming	-	√
Potentiometers for basic settings	√	√ can be overridden via NFC
Configurable current limit	-	√
Electronic motor thermal protection	-	√
Protection against locked rotor	-	√
Protection against low load	-	√
Max torque signalling	-	√
IR optical port for configuration and monitoring using optional USB (CX01), Wi-Fi (CX02) and RS485 (CX04)	-	√

Rated starter current le FLA (A)	Rated motor power 600V (HP)	BASIC				ADVANCED			
		Auxiliary supply Us							
		100-240 VAC		24VAC/DC		100-240 VAC		24VAC/DC	
Item #	Unit Price	Item #	Unit Price	Item #	Unit Price	Item #	Unit Price		
6.1	5	ADXNB006	\$250.15	ADXNB00624	\$262.70	ADXNP006	\$432.20	ADXNP00624	\$453.80
11	10	ADXNB012	\$303.50	ADXNB01224	\$318.70	ADXNP012	\$525.90	ADXNP01224	\$552.15
18	15	ADXNB018	\$330.20	ADXNB01824	\$346.75	ADXNP018	\$610.95	ADXNP01824	\$641.45
24.2	20	ADXNB025	\$376.95	ADXNB02524	\$395.80	ADXNP025	\$654.35	ADXNP02524	\$687.05
28	25	ADXNB030	\$467.00	ADXNB03024	\$490.35	ADXNP030	\$833.05	ADXNP03024	\$874.75
34	30	ADXNB038	\$573.70	ADXNB03824	\$602.40	ADXNP038	\$1072.55	ADXNP03824	\$1126.25
44	40	ADXNB045	\$693.80	ADXNB04524	\$728.50	ADXNP045	\$1253.55	ADXNP04524	\$1316.45

● Soft Starters ADXL Series



SIMPLE! INTELLIGENT! EFFICIENT!

- Easy programming in 4 steps only
- Programming via NFC or Wi-Fi
- APP for smart phone or tablet (free)
- Works from 208 to 600VAC
- Auxiliary supply from 120 to 240VAC
- Built-in bypass relay
- Optional RS485 communication
- Modbus-ASCII, Modbus-RTU, Modbus-TCP
- Programmable inputs and outputs

Item #	FLA (A)	208V HP	220-240V HP	380-415V HP	440-480V HP	550-600V HP	Unit Price
ADXL0030600	28	10	10	15	20	25	\$806.85
ADXL0045600	44	10	15	25	30	40	\$1100.95
ADXL0060600	60	20	20	30	40	50	\$1299.15
ADXL0075600	75	25	25	40	50	60	\$1490.60
ADXL0085600	83	25	30	50	60	75	\$1661.60
ADXL0115600	114	40	40	60	75	100	\$1832.45
ADXL0135600*	130	40	50	75	100	125	\$2160.65
ADXL0162600*	156	50	60	75	125	150	\$2361.75
ADXL0195600*	192	60	60	100	150	200	\$2700.90
ADXL0250600*	248	75	100	150	200	250	\$2867.65
ADXL0320600*	320	100	125	200	250	300	\$3191.80

*Terminal lugs kit not included

● Terminal Lugs and Protection Cover Kits

EXA01	KIT OF 3 TERMINAL LUGS FOR ADXL 135A,162A & 195A	\$53.10
EXA02	KIT OF 3 TERMINAL PROTECTION COVERS FOR ADXL 135A, 162A & 195A	\$91.60
EXA03	KIT OF 3 TERMINAL LUGS FOR ADXL 250A & 320A	\$170.00
EXA04	KIT OF 3 TERMINAL PROTECTION COVERS FOR ADXL 250A & 320A	\$150.05

● Manual Motor Starter Kits with Enclosure Type 4X



SM1Z1711P



SM1P...

Item #	Adjustment	Unit Price
SM1P0016KIT	0,1-0,16A	\$86.20
SM1P0025KIT	0,16-0,25A	\$86.20
SM1P0040KIT	0,25-0,4A	\$86.20
SM1P0063KIT	0,4-0,63A	\$86.20
SM1P0100KIT	0,63-1A	\$86.20
SM1P0160KIT	1-1,6A	\$86.20
SM1P0250KIT	1,6-2,5A	\$86.20
SM1P0400KIT	2,5-4A	\$86.20
SM1P0650KIT	4-6,5A	\$86.20
SM1P1000KIT	6,3-10A	\$86.20
SM1P1400KIT	9-14A	\$109.40
SM1P1800KIT	13-18A	\$109.40
SM1P2300KIT	17-23A	\$116.30
SM1P2500KIT	20-25A	\$116.30

● Manual Motor Starter Kits with Enclosure + E-STOP Type 4X



SM1Z1712P



SM1P...

Item #	Adjustment	Unit Price
SM1P0016EKIT	0,1-0,16A	\$117.65
SM1P0025EKIT	0,16-0,25A	\$117.65
SM1P0040EKIT	0,25-0,4A	\$117.65
SM1P0063EKIT	0,4-0,63A	\$117.65
SM1P0100EKIT	0,63-1A	\$117.65
SM1P0160EKIT	1-1,6A	\$117.65
SM1P0250EKIT	1,6-2,5A	\$117.65
SM1P0400EKIT	2,5-4A	\$117.65
SM1P0650EKIT	4-6,5A	\$117.65
SM1P1000EKIT	6,3-10A	\$117.65
SM1P1400EKIT	9-14A	\$123.05
SM1P1800EKIT	13-18A	\$123.05
SM1P2300EKIT	17-23A	\$135.40
SM1P2500EKIT	20-25A	\$135.40

Manual Motor Starter Kits Including Padlockable Enclosure Type 4X



SM1Z1715R



SM1R...

Item #	Adjustment	Unit Price
SM1R0016KIT	0,1-0,16A	\$131.35
SM1R0025KIT	0,16-0,25A	\$131.35
SM1R0040KIT	0,25-0,4A	\$131.35
SM1R0063KIT	0,4-0,63A	\$131.35
SM1R0100KIT	0,63-1A	\$131.35
SM1R0160KIT	1-1,6A	\$131.35
SM1R0250KIT	1,6-2,5A	\$131.35
SM1R0400KIT	2,5-4A	\$131.35
SM1R0650KIT	4-6,5A	\$131.35
SM1R1000KIT	6,3-10A	\$149.10
SM1R1400KIT	9-14A	\$149.10
SM1R1800KIT	13-18A	\$149.10
SM1R2300KIT	17-23A	\$162.75
SM1R2500KIT	20-25A	\$162.75

Limit Switches

- Metal housing
- Degree of protection IP65
- 1NO+1NC contact
- ½ NPT thread
- Certification: cULus



KMA1S11N



KMB1S11N



KML2S11N



KME1S11N



KMF1S11N



KMM2S11N

\$46.45

● Time Relay



- Multifunction
- Supply 12 to 240VAC/DC
- Time scale from 0.1 second to 10 days
- 1 relay output SPDT

TMM1

\$58.85

● Time Relay / Counter / Hour Counter with NFC Technology



- Supply: 12 to 240VAC/DC
- Relay output: 8A 250VAC
- Time scale: 0.1 second to 999 days
- Absolute time precision
- Can do more than 40 functions
- Password protection of parameters against undesirable modifications
- QR code for direct access to user's manual



TMM1NFC

\$71.75

● Protection Relays



- For three-phase systems, with or without neutral
- Minimum and maximum voltage
- Minimum and maximum frequency
- Asymmetry
- Phase loss and phase sequence
- With NFC technology
- 1 relay output (8A)

208-240VAC
PMV95NA240NFC

\$249.35

380-575VAC
PMV95NA575NFC

\$249.35

● Voltage Monitoring Relays - Phase Loss / Incorrect Phase Sequence



- For three-phase systems, without neutral
- Phase loss detection if one of the voltages is <70% rated value
- Phase loss tripping time: 60ms
- 1 relay output with 1 changeover contact (SPDT)
- Mounting on DIN rail or screw fixing via pull out tabs

100...240VAC
PMV20A240

\$137.90

208...575VAC
PMV20A575

\$137.90

600VAC
PMV20A600

\$137.90

● Voltage Monitoring Relays - Phase Loss / Incorrect Phase Sequence / Min. & Max AC Voltage



- For three-phase systems, without neutral
- True RMS (TRMS) measurements
- Control of phase-to-phase voltages
- Phase loss detection if one of the voltages is <70% rated value
- Phase loss tripping time: 60ms
- 1 relay output with 1 changeover contact (SPDT)
- Mounting on DIN rail or screw fixing via pull out tabs

208...240VAC
PMV50A240

\$201.55

380...575VAC
PMV50A575

\$201.55

600VAC
PMV50A600

\$201.55

● Level Control Relay



- Emptying or filling functions
- 24 to 240VAC/DC
- 1 relay output SPDT

LVM25240

\$153.85

Signal Tower Lights Ø50mm/1.97"

Max. 4 light modules + sound module or 5 light modules + top cover



OPTION 1

Wiring module
12-24VDC
LTN50MW024

or

Wiring module
110-230VAC
LTN50MW230

Extension tube
100mm
LTN50P100T

or

Extension tube
100mm
LTN50P100

Must be ordered with ↓

Fixing base
Plastic horizontal
LTN50BP1

or

Fixing base
Plastic vertical
LTN50BP2

OPTION 2

For direct mounting of the wiring module without extension tube and base, use these models :

Wiring module
12-24VDC
LTN50MWB024


or

Wiring module
110-230VAC
LTN50MWB230

Ø50mm		
Description	Item #	Unit Price
Top cover		
To be used only if sound module is not present	LTN50C	\$3.90
Continuous sound modules		
85dB. IP65. Type 4	LTN50MSL	\$36.70
100dB. IP20	LTN50MSH	\$36.70
Blinking or steady light modules. Integrated LED lamp IP65		
Orange	LTN50ML1	\$34.90
Green	LTN50ML3	\$34.90
Red	LTN50ML4	\$34.90
Blue	LTN50ML6	\$34.90
White	LTN50ML8	\$34.90
Wiring modules. IP65.		
12...24VDC tube mounting	LTN50MW024	\$52.30
110...230VAC tube mounting	LTN50MW230	\$95.20
12...24VDC screw mounting	LTN50MWB024	\$69.40
110...230VAC screw mounting	LTN50MWB230	\$116.30
Extension tubes		
100mm/3.94", metal with threaded end*	LTN50P100T	\$8.20
100mm/3.94", metal**	LTN50P100	\$7.85
Fixing bases		
Horizontal surface mounting, black plastic	LTN50BP1	\$8.50
Wall mounting, grey plastic	LTN50BP2	\$9.25

* Must be ordered with LTN50BP1

** Must be ordered with LTN50BP2

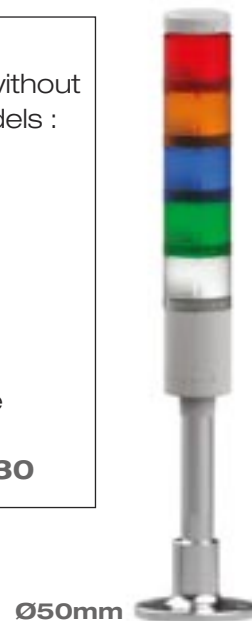

● Signal Tower Lights Ø70mm/2.75"

Max. 4 light modules + sound module or 5 light modules + top cover



OPTION 1

Wiring module
12-24VDC
LTN70MW024

or

Wiring module
110-230VAC
LTN70MW230

Extension tube
100mm
LTN70P100T

or

Extension tube
100mm
LTN70P100

Must be ordered with ↓

Fixing base
Plastic horizontal
LTN70BP1

Must be ordered with ↓

Fixing base
Plastic vertical
LTN70BP2

OPTION 2

For direct mounting of the wiring module without extension tube and base, use these models :

Wiring module
12-24VDC
LTN70MWB024

or

Wiring module
110-230VAC
LTN70MWB230

Ø70mm		
Description	Item #	Unit Price
Top cover		
To be used only if sound module is not present	LTN70C	\$4.00
Continuous sound modules		
85dB. IP65. Type 4	LTN70MSL	\$42.20
100dB. IP20	LTN70MSH	\$42.20
Blinking or steady light modules. Integrated LED lamp IP65		
Orange	LTN70ML1	\$40.10
Green	LTN70ML3	\$40.10
Red	LTN70ML4	\$40.10
Blue	LTN70ML6	\$40.10
White	LTN70ML8	\$40.10
Wiring modules. IP65.		
12...24VDC tube mounting	LTN70MW024	\$60.20
110...230VAC tube mounting	LTN70MW230	\$104.90
12...24VDC screw mounting	LTN70MWB024	\$79.85
110...230VAC screw mounting	LTN70MWB230	\$133.75
Extension tubes		
100mm/3.94", metal with threaded end*	LTN70P100T	\$8.40
100mm/3.94", metal**	LTN70P100	\$8.10
Fixing bases		
Horizontal surface mounting, black plastic	LTN70BP1	\$8.70
Wall mounting, grey plastic	LTN70BP2	\$9.65

* Must be ordered with LTN70BP1

** Must be ordered with LTN70BP2



● Pilot Lights LED Type



LPML		Colour
Voltage	↑	↑
12VAC/DC	A	1 ■
24VAC/DC	B	3 ■
48VAC/DC	D	4 ■
110VAC	E	5 ■
110VDC	F	6 ■
230VAC	M	7 □
220VDC	N	

\$11.00

Protection Degree : As per UL: 3R, 4/12, 4X / As per IEC: IP66, IP67, IP69K

● Monoblock Potentiometers



LPCPA	
001	1 kΩ
002	2.5 kΩ
005	5 kΩ
010	10 kΩ
050	50 kΩ
100	100 kΩ
500	500 kΩ

\$51.40

Protection Degree : As per UL: 3R, 4/12, 4X / As per IEC: IP66, IP67, IP69K

● Pulse and Steady Tone Monoblock Buzzers



IP40: sound intensity 90dB/10cm.
IP69K: sound intensity 80dB/10cm.

\$52.70

\$54.80

Supply voltage
9-15VAC/DC
18-30VAC/DC
85-140VAC/DC
185-265VAC/DC

IP40
LPCZSA
LPCZSB
LPCZSE
LPCZSM

Supply voltage
9-15VAC/DC
18-30VAC/DC
85-140VAC/DC
185-265VAC/DC

IP69K
LPCZSAIP
LPCZSBIP
LPCZSEIP
LPCZSMIP

● Communication Interfaces




LPCD	
USB	01 3.0 A/A connection type
USB	03 3.0 A/B connection type
USB	05 3.0 B/A connection type
RJ45	06 Ethernet connection type (shielded)

\$41.05

Protection Degree : As per UL: 3R, 4/12, 4X / As per IEC: IP65 (with cap mounted)


Pushbutton Kits
Degree of protection NEMA 4X (IP69K)

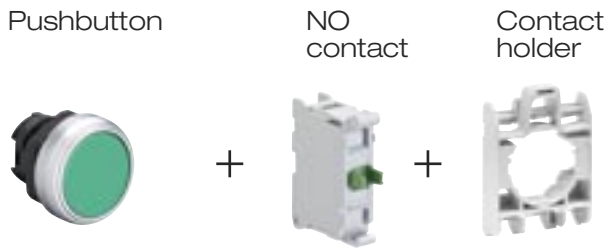

- LPCB102K10 (black)
- LPCB103K10 (green)
- LPCB104K10 (red)
- LPCB104K01 (red, with NC contact)
- LPCB105K10 (yellow)
- LPCB106K10 (blue)
- LPCB108K10 (white)

\$11.70


E-Stop Kit
Degree of protection NEMA 4X (IP69K)

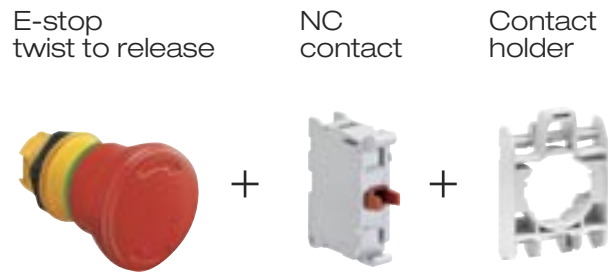

LPCB6644K01


\$26.05

Selector Kits
Degree of protection NEMA 4X (IP69K)

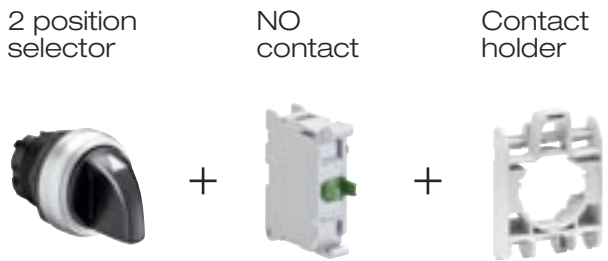

LPCS120K10


\$18.95

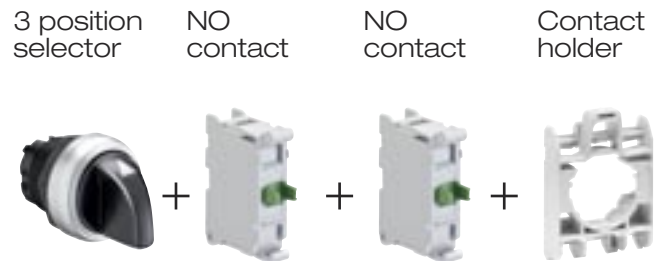

LPCS130K20


\$23.20

Key Selector Kits
Degree of protection NEMA 4X (IP69K)

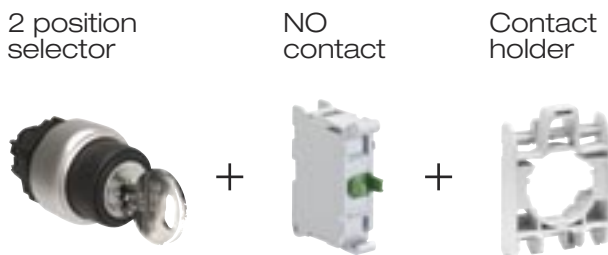

LPCS320K10

\$30.05

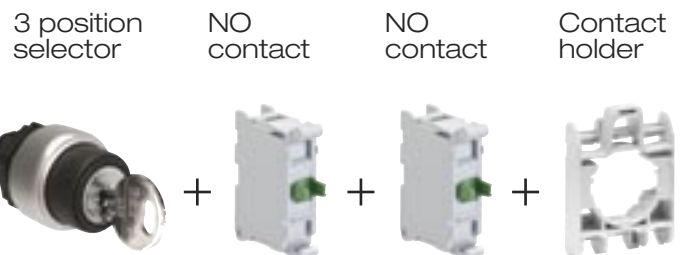

LPCS330K20

\$38.40

22mm Metal Pushbutton Kits

Degree of protection NEMA 4X (IP69K)

Pushbutton

NO
contact

Contact
holder



+



+



LPSB102K10 (black)
LPSB103K10 (green)
LPSB104K10 (red)
LPSB104K01 (red, with NC contact)

LPSB105K10 (yellow)
LPSB106K10 (blue)
LPSB108K10 (white)

\$16.95

22mm Metal Selector Kits

Degree of protection NEMA 4X (IP69K)

2 position
selector

NO
contact

Contact
holder



+



+



LPSS120K10

\$25.90

3 position
selector

NO
contact

NO
contact

Contact
holder



+



+



+



LPSS130K20

\$30.80

22mm Metal Key Selector Kits

Degree of protection NEMA 4X (IP69K)

2 position
selector

NO
contact

Contact
holder



+



+



LPSS320K10

\$48.80

3 position
selector

NO
contact

NO
contact

Contact
holder



+



+



+



LPSS330K20

\$58.35

● **Yellow Control Station with Protection in Polycarbonate Enclosure
NEMA 4X (IP69K)**

LPZP1B5P603

Turn to release E-stop
with 1NC contact ISO 13850

\$63.55



● **Yellow Control Station with 1 Actuator in Polycarbonate Enclosure
NEMA 4X (IP69K)**

LPZP1B5603

Twist to release E-Stop
with 1NC contact ISO 13850

\$52.05



● **Grey Control Stations with 1 Actuator in Polycarbonate Enclosure
NEMA 4X (IP69K)**

LPZP1B8101

Green p.b. "START" symbol
with 1NO contact

\$31.50



LPZP1B8302

Key selector 2 positions "0-I"
label with 1NO & 1NC contacts

\$63.10



LPZP1B8103

Red p.b. "STOP" symbol
with 1NC contact

\$31.50



● **Grey Control Stations with 2 Actuators in Polycarbonate Enclosure NEMA 4X (IP69K)**

LPZP2B8900

Green p.b. "I" symbol with 1NO contact and red p.b. "O" symbol with 1NC contact

\$51.60



LPZP2B8902

White p.b. up arrow symbol with 1NO contact and black p.b. down arrow symbol with 1NO contact

\$51.60



● **METAL Control Stations IP67 (Type 4X)**



Item #	Description	Cover	Unit Price
LPZM1A5	1 hole	Yellow	\$41.05
LPZM1A5P	1 hole with guard	Yellow	\$54.80
LPZM1A8	1 hole	Grey	\$41.05
LPZM2A5	2 holes	Yellow	\$47.90
LPZM2A8	2 holes	Grey	\$47.90
LPZM3A8	3 holes	Grey	\$57.45
LPZM4A8	4 holes	Grey	\$82.15
LPZM5A8	5 holes	Grey	\$109.40
LPZM6A8	6 holes	Grey	\$134.05

● **2 or 4 Direction Metal Joysticks NEMA 4X (IP69K)**

LPSJ200

2 directions spring return with 2NO contacts

\$61.70



LPSJ400

4 directions spring return with 4NO contacts

\$83.30



LPSJ211

2 directions maintained interlock with 2NO contacts

\$74.05

LPSJ411

4 directions maintained interlock with 4NO contacts

\$99.95

● 16A Cam Switches Voltmeter/Ammeter



Voltmeter
Phase-Phase L1L2-L2L3-L3L1, front mount
GX1667U

\$45.50

Ammeter
With or without CT, L1-L2-L3, front mount
GX1697U

\$76.75

Ammeter
With CT, L1-L2-L3, front mount
GX1698U

\$48.25

UL/CSA general use [A]	UL/CSA horsepower ratings					
	1 phase		3 phases			
	120V	230V	200V	230V	480V	600V
12	¼	1	1½	3	5	5

● 25A Cam Switches ON/OFF type



1 pole
Front mount
7GN2590U

\$45.50

2 poles
Front mount
7GN2591U

\$48.25

3 poles
Front mount
7GN2510U

\$50.75

UL/CSA general use [A]	UL/CSA horsepower ratings					
	1 phase		3 phases			
	120V	230V	200V	230V	480V	600V
30	1½	3	3	5	10	15

● 25A Changeover Cam Switches 1-0-2



3 poles
Front mount
7GN2553U

\$62.40

4 poles
Front mount
7GN2575U

\$76.75

UL/CSA general use [A]	UL/CSA horsepower ratings					
	1 phase		3 phases			
	120V	230V	200V	230V	480V	600V
30	1½	3	3	5	10	15

● Enclosed Disconnects



32A



63A



80A

- Padlockable handle (for 3 padlocks in OFF position)
- Degree of protection: IP65; Nema type 4X
- Rated insulation voltage U_i : 1000VAC
- Rated as motor disconnect
- Also rated as manual motor controller

GAZ032UL

GAZ063SAUL

GAZ080UL

\$64.75

\$123.05

\$176.10

● 32A, 63A or 80A Disconnect Kits



+



+



The kit includes:

- 32A, 63A or 80A disconnect rated as motor disconnect
- Shaft 200mm length
- Padlockable GAX63 handle, ring-type fixing, Nema type 4X

32A

GA032KIT

63A

GA063KIT

80A

GA080KIT

\$61.55

\$93.00

\$118.90

200A, 400A, 600A or 800A Non Fusible Disconnect Kits with Pistol Handle



200A
GL0200C1ULKIT
\$483.15

The GL0200C1ULKIT includes:

- 200A disconnect UL98 (CSA 22.2 No. 4)
- Shaft 300mm length
- Padlockable pistol grip handle (defeatable) red/yellow, type 4X

400A
GL0400C1ULKIT
\$716.50

The GL0400C1ULKIT includes:

- 400A disconnect UL98 (CSA 22.2 No. 4)
- Shaft 500mm length
- Padlockable pistol grip handle (defeatable) red/yellow, type 4X



600A
GL0600C1ULKIT
\$1174.95

The GL0600C1ULKIT includes:

- 600A disconnect UL98 (CSA 22.2 No. 4)
- Shaft 500mm length
- Padlockable pistol grip handle (defeatable) red/yellow, type 4X
- Shaft alignment ring



800A
GL0800C1ULKIT
\$1731.85

The GL0800C1ULKIT includes:

- 800A disconnect UL98 (CSA 22.2 No. 4)
- Shaft 500mm length
- Padlockable pistol grip handle (defeatable) red/yellow, type 4X
- Shaft alignment ring

● 30A, 60A, 100A or 200A Fusible Disconnect Kits (UL98) Type “J”

The kit includes:

- 30A, 60A, 100A or 200A fusible disconnect (UL98)
- Shaft 300mm length
- Padlockable pistol grip handle (defeatable)
red/yellow Type 4X



30A: GMFJ030C12KIT

\$232.30



60A: GMFJ060C03KIT

\$290.05

100A: GMFJ100C03KIT

\$362.35

200A: GMFJ200C03KIT

\$799.80

● Energy Meters - Multimeters



Single, Two and Three Phase with or without neutral	DMG600
Icon-text LCD	✓
Voltage-Current measurements	✓
Frequency-Power measurements	✓
Power factor measurement	✓
Active-Reactive energy measurements	✓
THD (Total Harmonic Distortion Analysis)	✓
Usage in low to high voltage systems	✓
Measuring Range 50-720VAC phase to phase (30-360VAC ph-N)	✓
Supply voltage range 100-400VAC/120-250VDC	✓
Front optical port	✓
Built-in RS485 communication port	DMG610

DMG600

\$433.40

DMG610

\$465.15

**Built-in RS485
communication port**

● HMI Displays

- Widescreen display with resistive touchscreen
- LED backlight
- Ethernet, USB and serial port (type RS232-RS485-RS422)
- Auxiliary supply: 12-24VDC
- Protection degree: IP66, type 2 and 4X (front); IP20 (rear)



**HMI 4.3"
LRHA04**

\$482.40



**HMI 7"
LRHA07**

\$522.60



**HMI 10.1"
LRHA10**

\$1175.15

**Programming
Licence for 1 user
LRHSW01**

\$183.60

● Fuse Holders



- Maximum rated voltage Ue 690VAC
- Operational voltage for status light indicator 120...690 VAC
- Compact sizes compliant with standards for electrical equipment
- UL and CSA certified versions

Item #	Description	Status Indicator	Qty/ pkg	Unit Price
MIDGET FUSE HOLDERS (10X38)				
FB01F1P	Fuse holder 1 pole 690V 32A	No	12	\$6.80
FB01F1PL	Fuse holder 1 pole 690V 32A	Yes	12	\$13.00
FB01F2P	Fuse holder 2 poles 690V 32A	No	6	\$14.65
FB01F3P	Fuse holder 3 poles 690V 32A	No	4	\$21.90

CC FUSE HOLDERS (10X38)				
FB01G1P	Fuse holder 1 pole 600V 30A	No	12	\$6.80
FB01G1PL	Fuse holder 1 pole 600V 30A	Yes	12	\$13.00
FB01G2P	Fuse holder 2 poles 600V 30A	No	6	\$15.05
FB01G3P	Fuse holder 3 poles 600V 30A	No	4	\$21.90

Note: These items are sold by package only

● Switching Power Supplies



- Rated output voltage: 24VDC
- Output power: 5...480W
- Wide input voltage range (90 to 265VAC & 120 to 375VDC)
- High efficiency up to 92%
- Adjustable output voltage
- Parallel connection using switch placed on front (some models)
- Certification: cULus Listed

Item #	Description	Output Voltage DC	Current DC	Output Power	Unit Price
PSL100524	Single Phase	24	0.21A	5W	\$45.55
PSL101024	Single Phase	24	0.42A	10W	\$46.90
PSL101824	Single Phase	24	0.75A	18W	\$51.90
PSL106024	Single Phase	24	2.5A	60W	\$85.25
PSL124024	Single Phase	24	10A	240W	\$242.75
PSL130024	Single Phase	24	12.5A	300W	\$336.40
PSL148024	Single Phase	24	20A	480W	\$374.60

● Compact Switching Power Supplies



- Rated output voltage: 24VDC
- Output power: 30...120W
- Wide input voltage range (120 to 240VAC)
- High efficiency up to 89%
- Adjustable output voltage
- Certification: cULus Listed

Item #	Description	Output Voltage DC	Current DC	Output Power	Unit Price
PSE103024	Single Phase	24	1.25A	30W	\$55.35
PSE105024	Single Phase	24	2.1A	50W	\$64.40
PSE107224	Single Phase	24	3A	72W	\$78.85
PSE110024	Single Phase	24	4.2A	100W	\$95.75
PSE112024	Single Phase	24	5A	120W	\$125.20

● HMI Starter Kits



24VDC Supply

The kit includes:

- PLC 12 inputs + 8 outputs
- All programming softwares
- All programming cables
- 1 programming licence
- 1 HMI

HMI 4.3"

LRD20HMI04KIT

\$1279.30

HMI 7"

LRD20HMI07KIT

\$1404.50

HMI 10.1"

LRD20HMI10KIT

\$2208.80

● Micro PLC Starter Kits



- 120VAC or 240VAC Supply type with 6 inputs + 4 outputs

LRDKIT10RA240

- 24VDC or 24VAC Supply type with 8 inputs + 4 outputs

LRDKIT12RD024
LRDKIT12RA024

Includes Software LRXSW and USB cable LRXC03

\$210.60

● Micro PLC



- 120VAC or 240VAC Supply type with 6 inputs + 4 outputs

LRD10RA240

- 24VDC or 24VAC Supply type with 8 inputs + 4 outputs

LRD12RD024
LRD12RA024

\$165.50

Definite Purpose Contactors

Ideal for air conditioning, heating, ventilation, refrigeration in the HVAC industry, compressors, food and beverage industry.



DPBG12



DPBF09
DPBF12
DPBF18



DPBF26
DPBF32



DPBF50
DPBF65

Item #	Motor Full Load Amps (FLA) 600V	Locked Rotor Amps (LRA)			Resistive Load 600V	Maximum Horsepower						Type of Terminal	Unit Price
		240V	480V	600V		1 Phase		3 Phase		240V	480V		
	[A]	[A]	[A]	[A]	[A]	[HP]	[HP]	[HP]	[HP]	[HP]	[HP]		

Non-reversing three-pole definite purpose contactors, 600VAC.

DPBG1210A①	14	84	84	84	20	3/4	2	3	3	10	10	Clamp-screw	\$37.55
DPBF0910A①	20	120	120	100	30	1 1/2	3	5	5	10	10	Clamp-screw	\$37.55
DPBF1210A①	25	150	150	125	30	2	3	5	5	10	15	Clamp-screw	\$43.85
DPBF1810A①	30	180	180	150	32	2	5	7 1/2	7 1/2	15	20	Clamp-screw	\$50.10
DPBF2600A①	40	240	240	200	50	3	7 1/2	10	10	30	30	Clamp-screw	\$56.35
DPBF3200A①	50	300	300	250	55	3	10	15	15	30	40	Clamp-screw	\$68.85
DPBF5000A①	70	420	420	350	90	5	15	20	25	50	50	Double lug-clamp	\$161.45
DPBF6500A①	80	480	480	400	100	7 1/2	15	25	30	60	60	Double lug-clamp	\$174.00

Accessory.

BFX8903	Metal screw-fixing plate for DPBF09-DPBF32 types	\$2.55
---------	--	--------

DPBG12, DPBF09, DPBF12 and DPBF18 are supplied with built-in 1NO auxiliary contact (SPST). Types with 1NC contact are also available; in the item #, replace digits "10" with "01".

① Complete item # with coil code from the table below:

Code	Voltage range
02460	24VAC 60Hz
12060	120VAC 60Hz
23060	230VAC 60Hz
46060	460VAC 60Hz
57560	575VAC 60Hz

Main Features:

- Motor FLA ratings at 600VAC: 14 to 80A
- Finger safe terminals
- Positive (force) guided contacts
- Up to four front or side mount auxiliary contacts
- Highly conductive auxiliary contacts
- Quick and simple installation for accessories
- Easy coil replacement
- Wide coil operating range.

Operating characteristics

- All types have undergone UL endurance tests of 250,000 cycles.
- Average coil consumption at 20°C/70°F:

	In rush	Holding
• DPBG12	25VA	4VA
• DPBF09-32	75VA	9VA
• DPBF50-65	210VA	15VA
- Built-in auxiliary contact ratings: A600 for all SPST, if any
- Screw termination:

	Torque	Wire size
• DPBG12	9lbin	AWG8-12
• DPBF09-18	13-16lbin	AWG8-16
• DPBF26-32	22-27lbin	AWG6-14
• DPBF50-65	44lbin	AWG2-14
- Operating temperature:
 - DPBG12: -40...+60°C/-40...+140°F
 - DPBF: -50...+70°C/-60...+160°F.


Certifications and compliance

Certifications: UL Listed for USA and Canada (cULus - File E93602) under Motor Controllers – Definite purpose contactors.


All contactors are CE marked per European Union requirements.

Compliant with standards: UL/CSA C22.2 n°60947-1, UL/CSA C22.2 n°60947-4-1, UL 508, CSA C22.2 n°14.


DIMENSIONS [mm (in)] Definite-purpose contactors DPBG12




DPBF09-DPBF12-DPBF18

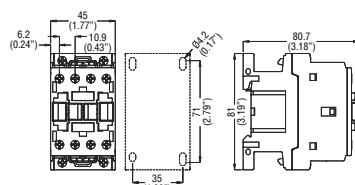

DPBF26-DPBF32

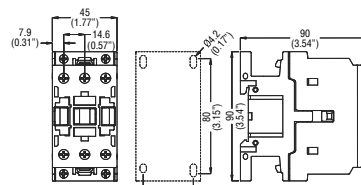

Fixing plate BFX8903



DPBF50-DPBF65




Prices are subject to change without notice

All products are CSA or cULus approved

**ALWAYS INDICATE LOVATO CANADA PROMO 2025 CODE
WHEN PLACING ORDERS THROUGH AUTHORIZED DISTRIBUTORS.**

Expiration date: December 31, 2025

NOTES

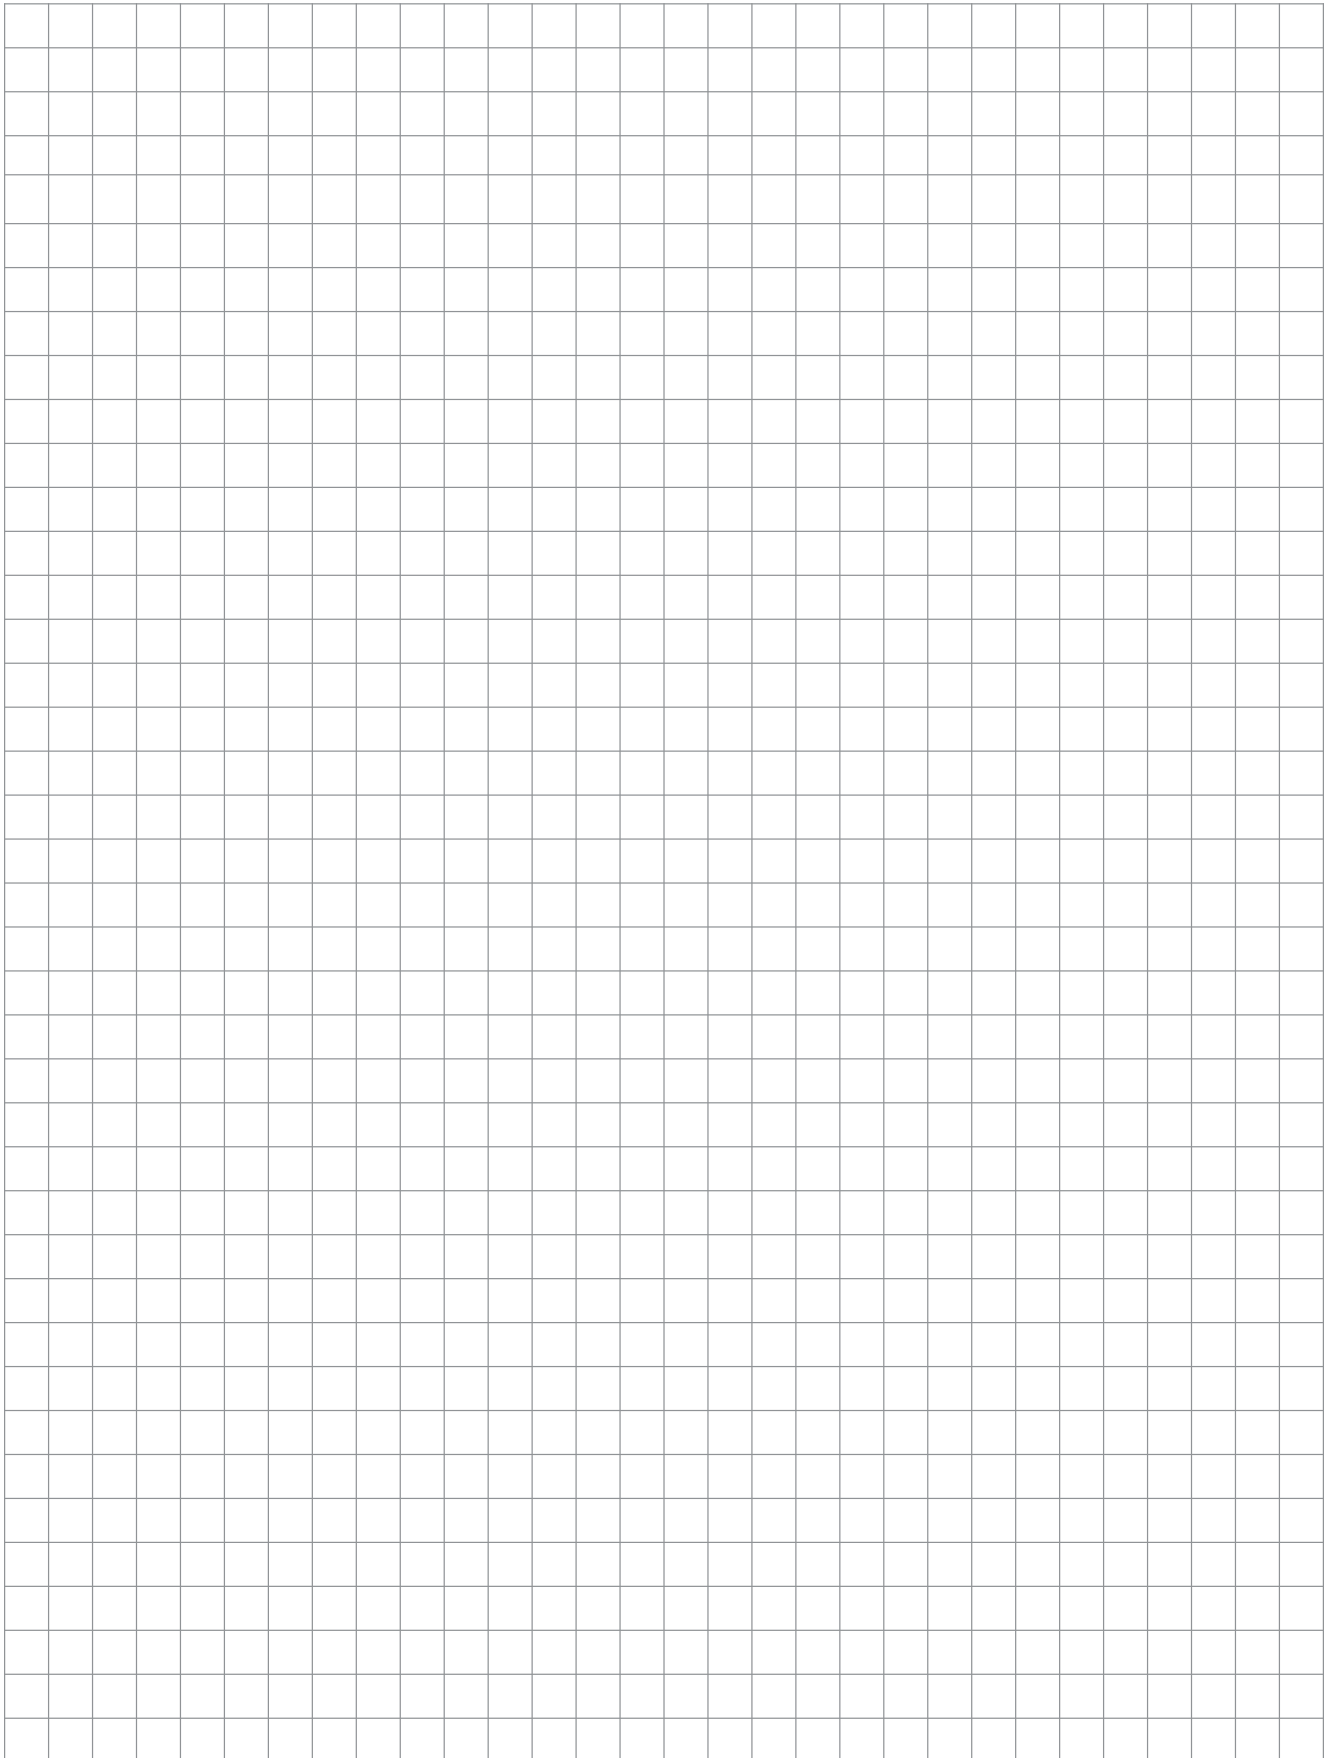A large, empty grid of small squares occupying most of the page, intended for handwritten notes.

PROMOTIONS 2025



LOVATO ELECTRIC CORPORATION

4500 Garand Street
Laval (Quebec) H7L 5Z6
tel 450-681-9200
info@Lovato.ca

www.Lovato.ca

